


DATA SHEET


FortiCarrier™ 3000E Series

Available in:

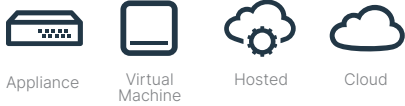

Massive Signaling Surge Process Capacity

Fortinet introduces the FortiCarrier 3000 E-Series appliances — a Carrier-Grade Nat (CGN) solution that is purpose-built from the ground up to facilitate the massive device growth of the all-connected world. The platform’s advanced architecture comes with the industry’s largest connection scale designed for the most-demanding IPv4 BYOD roll-out and tomorrow’s IPv6 IoT expansion.

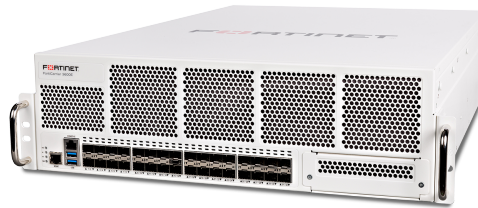

Proven Carrier-Grade NAT (CGN) Solution

The FortiCarrier series has long provided iron-clad security services in many service provider and large enterprise networks. The new FortiCarrier 3000 E-Series focuses on the Carrier-Grade IPv4/v6 Network services, based on the same familiar interface and proven carrier-grade reliability of the FortiOS.

Coupled with a new architecture that is designed specifically for mobile deployments, the new FortiCarrier 3000 E-Series brings high predictability and service-level consistency to environments that generate massive amounts of connection set-ups and tear-downs. With Fortinet’s powerful Flow Processing Unit FP1, the FortiCarrier 3000 E-Series delivers not only a high level of performance supporting up to 3 Million Connections per Second, 400 Million Concurrent Sessions and high performance of 160 Gbps in a single CGN Appliance with hardware acceleration, ensuring consistent high performance.



Key Features and Benefits

High Performance in Three Dimensions

Specialized architecture designed for the most demanding IPv4/v6 mobile network expansions that require massive connection scalability, high forwarding capacity and powerful processor to stabilize core networks from frequent signaling surges.

Reduces Upgrade Churns

Comprehensive Carrier-Grade NAT (NAT44, NAT444) options to meet any legacy IPv4 network upgrade requirements. A broad range of advanced IPv6 Migration technologies are included.

Lowest Total Cost of Ownership

The three-dimensional high-performances combined with the rich feature set in CG-NAT and IPv6 migration technologies enable FortiCarrier 3000 E-Series to offer the lowest total cost of ownership (TCO) of any CGN appliances in the market.

Highlights

- Specialized hardware acceleration architecture capable of processing massive signaling surges up to 3 Million Connections per Second
- Built for BYOD and IoT with support for 400 Million Concurrent Sessions
- Compact 3U form factor is ideal for space-constraint applications and lowers colocation cost for service providers
- Comprehensive Carrier-Grade NAT and IPv6 migration option including: NAT44, NAT444, NAT64/DNS64, NAT46


DEPLOYMENT

Mobile Service Providers

The FortiCarrier 3000 E-Series provides two critical functions for mobile broadband services. The architecture's high scalability can be used to generate more revenue by expanding the subscriber base and the associated IP address infrastructure capacity, from a single internet-facing IP address into hundreds of thousands more private IP addresses.

Additionally, a deployment of the CGN appliance on the Gi/sGi interface also enhances the overall network security by hiding the subscribers' IP addresses from the internet.

To completely secure the mobile Evolved Packet Core, Fortinet recommends a complementary FortiGate with the FortiOS-Carrier license to be deployed as a Gi/sGi firewall. The same FortiGate can perform a secondary function as a RAN Security gateway to aggregate advanced mobile protocols, such as GTP, SCTP and IPsec.

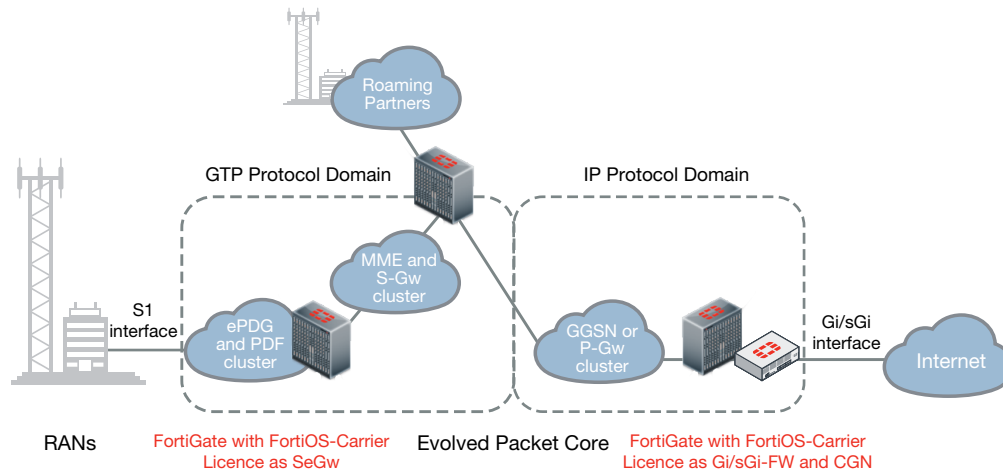


CGN Deployment in Mobile Service Provider Networks

Enterprise or Managed Service Providers

The comprehensive IPv4 and IPv6 feature sets allow FortiCarrier 3000 E-Series to provide maximum deployment flexibility.

Broad options of tunneling and encapsulation of IPv4 and IPv6 technologies are available to seamlessly connect any type of IP clients into any type of IP networks and finally to any internet content.

The accompanying diagram shows a typical use case — starting with the expansion of an existing IPv4 network and followed by the introduction of a new IPv6 network. Using different IPv4 and IPv6 transition technologies, both new native IPv6 and IPv4 clients can coexist.

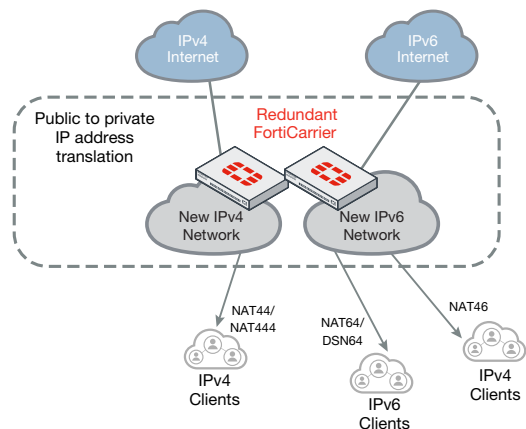


CGN Deployment in Enterprise or Managed Service Provider Networks



HARDWARE


FortiCarrier 3600E

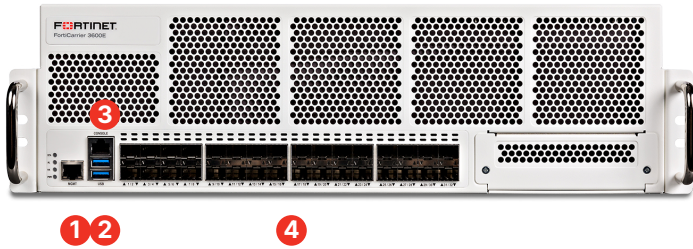

Interfaces

1. GE RJ45 Management Port
2. 2x USB Ports
3. Console Port
4. 32x 1 GE SFP/10 GE SFP+ Ports

FortiCarrier 3800E/-DC

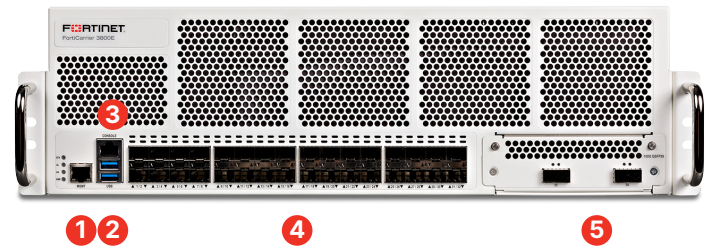

Interfaces

1. GE RJ45 Management Port
2. 2x USB Ports
3. Console Port
4. 32x 1 GE SFP/10 GE SFP+ Ports
5. High-Speed Network Interfaces: 2x 100 GE QSFP28

Hardware-based Performance

- Route/policy lookup, NAT, logging, and port resource management are performed by Flow Processing Unit FP1
- Predictable and consistent performance

NAT and Session Setup

- High performance NAT session setup acceleration in hardware
- High logging performance acceleration in hardware
- Fixed/deterministic NAT: private IP to public IP mapping and/or port range mapping
- Port block allocation (PBA) mode for lower logging overhead and higher cps rate
- Single port allocation (SPA) mode for better port resource sharing
- Full cone NAT (EIM/EIF) support
- Hairpinning support
- User quota control on port resource usage
- User quota control on max concurrent session count
- Source port preservation pool for special applications
- Essential service pool enables better user experience

Resource Pool Management

- Software assisted IP selection for dynamic NAT: round robin or random

Session Handling

- Per application time-out control
- ICMP translation
- GRE/PPTP/L2TP translation
- IP fragment translation
- IP fragments are first defragmented and then translated
- Application Layer Gateway support (FTP/TFTP/SIP/MGCP/PPTP/L2TP/ICMP Error/IP-options)
- Logging on NAT mapping or every session
- Two logs per mapping/session
- Support up to 16 logging servers with hash-based load balance
- Syslog over UDP
- NetFlow v9 or IPFIX over UDP
- HA clustering: active/passive mode with hardware-based NAT/session sync

IPv6 Support and Transition

- IPv6 Network address translation support including NAT66, NAT64 and DNS64 (DNS proxy) and NAT46
- IPv6 firewall policies
- IPv6 in dynamic routing including RIPng and BGP
- Dual stack routing
- IPv6 Tunneling
- SIP over IPv6
- CPU to handle the IPv6 traffic



SPECIFICATIONS

	FORTICARRIER 3600E	FORTICARRIER 3800E	FORTICARRIER 3800E-DC
System Specifications			
Throughput *	160 Gbps	160 Gbps	160 Gbps
Packet per Second **	50 Million	50 Million	50 Million
Connection per Second (Full TCP)	3 Million	3 Million	3 Million
Concurrent Sessions	400 Million	400 Million	400 Million
Hardware Specifications			
Network Interfaces	32× 1 GE SFP/10 GE SFP+	32× 1 GE SFP/10 GE SFP+, 2× 100 GE QSFP28	32× 1 GE SFP/10 GE SFP+, 2× 100 GE QSFP28
GE RJ45 Management Interface	1	1	1
Storage	2× 480 GB (960 GB total)	2× 480 GB (960 GB total)	2× 480 GB (960 GB total)
Power Supply	Dual	Dual	Dual
Environment			
Form Factor	3U Appliance	3U Appliance	3U Appliance
Input Voltage	100–240V AC, 50/60 Hz	100–240V AC, 50/60 Hz	-36V DC – -72V DC
Power Consumption (Average / Maximum)	613 W / 834 W	633 W / 858 W	633 W / 858 W
Maximum Current	120V/12A, 240V/7A	120V/12A, 240V/7A	36–17A
Heat Dissipation	2847 BTU/h	2929 BTU/h	2929 BTU/h
Operating Temperature	32–104°F (0–40°C)	32–104°F (0–40°C)	32–104°F (0–40°C)
Storage Temperature	-13–158°F (-25–70°C)	-13–158°F (-25–70°C)	-13–158°F (-25–70°C)
Humidity	20–90% non-condensing	20–90% non-condensing	20–90% non-condensing
Compliance			
Regulatory Compliance	FCC Part 15 Class B, VCCI, CE, CB, UL/c	FCC Part 15 Class A, VCCI, CE, CB, UL/c	FCC Part 15 Class A, VCCI, CE, CB, UL/c
Safety	CSA, CE, UL	CSA, CE, UL	CSA, CE, UL
Dimensions			
Height x Width x Length (inches)	5.16 × 17.24 × 26.18	5.16 × 17.24 × 26.18	5.16 × 17.24 × 26.18
Height x Width x Length (mm)	131 × 438 × 665	131 × 438 × 665	131 × 438 × 665
Weight	55.98 lbs (25.39 kg)	57.17 lbs (25.93 kg)	57.17 lbs (25.93 kg)

* Performance is measured with 1500 byte packet.

** Performance is measured with 64 byte packet.

ORDER INFORMATION

Product	SKU	Description
FortiCarrier 3600E	FCR-3600E	High Performance CGN Security Gateway — 1x GE RJ45 port, 32× 1 GE SFP/10 GE SFP+ slots, FP1 accelerated, 2× 480 GB SSD internal storage, dual AC power supplies.
FortiCarrier 3800E	FCR-3800E	High Performance CGN Security Gateway — 1x GE RJ45 port, 32× 1 GE SFP/10 GE SFP+ slots, 2× 100 GE QSFP28 slots, FP1 accelerated, 2× 480 GB SSD internal storage, dual AC power supplies.
FortiCarrier 3800E-DC	FCR-3800E-DC	High Performance CGN Security Gateway — 1x GE RJ45 port, 32× 1 GE SFP/10 GE SFP+ slots, 2× 100 GE QSFP28 slots, SPU accelerated, dual DC power supplies.



www.fortinet.com

Copyright © 2021 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.